


CITADIN™ 80 PAVER

REGULAR OR SMOOTH PREMIUM ① FINISHES



CITADIN™ 80 PAVER

	HEIGHT X WIDTH X LENGTH CM / IN		
	8 x 40 x 60	3 ¹ / ₈ x 15 ³ / ₄ x 23 ⁵ / ₈	
Units/Surface	4,17 /m ²	0,39 /ft ²	Regular finish
Qty/row	0,96 m ²	10,33 ft ²	Gray and charcoal
Qty/cube	8,64 m ²	92,97 ft ²	Ice gray
Weight/unit	45 kg	99 lb	Travertine beige
Weight/cube	1599 kg	3525 lb	Smooth Premium ① finish
			Ivory beige

Approximate coverage areas for one bag of polymeric sand (22,7 kg) 13,24 m² 142,5 ft²

COLORS




● Gray and charcoal



● Ice gray



● Travertine beige




● Ivory beige ①




Colors with solar reflectance indices contributing to the LEED program in order to reduce the creation of heat islands in urban areas as much as possible.

PATTERNS



Pattern 1
Runner pattern
(80 x 400 x 600)



Pattern 2
Checker pattern
(80 x 400 x 600)

TECHNICAL INFORMATIONS

Product	Standard	Compressive strength	Durability to freeze-thaw cycles with utilisation of de-icing salts	Water absorption	Dimensional tolerances
Citadin 80 paver	CSA A231.2	50 MPa (7250 psi)	Maximum loss of initial weight in saline solution (NaCl 3%): 225 g/m ² (0,74 oz / ft ²) after 28 cycles 500 g/m ² (1,64 oz / ft ²) after 49 cycles	5 % maximum	Length: -1 mm to +2 mm (-1/32 in to + 5/64 in) Width: -1 mm to +2 mm (-1/32 in to + 5/64 in) Height: ±3 mm (±1/8 in)

SPECIFICATION CLAUSE

SPEC. NOTE: Include the following article in part 2-Products of section 32 14 13-Precast Concrete Pavers. It prescribes the choice for BOLDUC autoblocking Urban Pavers for landscaping purposes. It should describe the geometric and physical characteristics and indicate the paver selected, its dimensions, color and finish.

PART 2 - PRODUCTS

21 Precast Concrete Pavers


- 1 Precast concrete pavers complying with CSA A231.2 and the following prescriptions.
- 2 Citadin 80 paver supplied by BOLDUC.
 - 1 Thickness: 8 cm (3¹/₈ in)
 - 2 Nominal Dimensions:
 - 3 Color:
 - 4 Texture: Regular or Smooth Premium Finishes

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches.

PRESTIGE™ 80 PAVER

PREMIUM FINISHES

PATTERNS

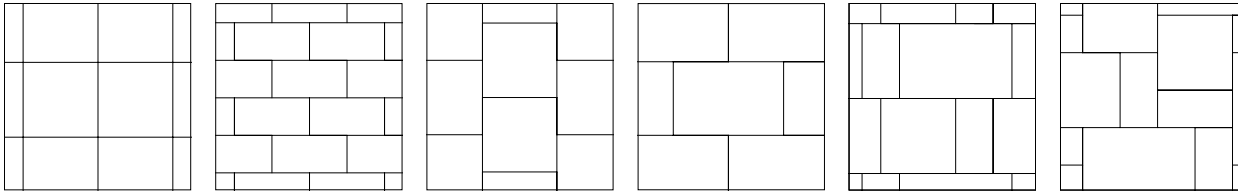

Checker pattern

Runner pattern

Runner pattern

Runner pattern

Runner pattern

Modular pattern

The layout shown in the above illustration is for information purposes only. Bolduc disclaims all responsibility for the excess or lack of pavers resulting from an installation according to these laying patterns.

TECHNICAL INFORMATIONS

Product	Standard	Compressive strength	Durability to freeze-thaw cycles with utilisation of de-icing salts	Water absorption	Dimensional tolerances
Prestige 80 paver	CSA A231.2	50 MPa (7250 psi)	Maximum loss of initial weight in saline solution (NaCl 3%): 225 g/m ² (0,74 oz / ft ²) after 28 cycles 500 g/m ² (1,64 oz / ft ²) after 49 cycles	5 % maximum	Length: -1 mm to +2 mm (-1/32 in to + 5/64 in) Width: -1 mm to +2 mm (-1/32 in to + 5/64 in) Height: ±3 mm (±1/8 in)

SPECIFICATION CLAUSE

SPEC. NOTE: Include the following article in part 2-Products of section 32 14 13-Precast Concrete Pavers. It prescribes the choice for BOLDUC autoblocking Urban Pavers for landscaping purposes. It should describe the geometric and physical characteristics and indicate the paver selected, its dimensions, color and finish.

PART 2 - PRODUCTS

2.1 Precast Concrete Pavers

- 1 Precast concrete pavers complying with CSA A231.2 and the following prescriptions.
- 2 Prestige 80 paver supplied by BOLDUC.
 - 1 Thickness: 8 cm (3¹/₈ in)
 - 2 Nominal Dimensions:
 - 3 Color:
 - 4 Texture: Smooth Premium or Grenart Premium finishes

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches.