LINIA™ 180 WALLSTONE
SMOOTH FINISH




LINIA™ 180 WALLSTONE

	HEIGHT/DEPTH/LENGTH DIMENSIONS (CM)	DIMENSIONS (IN)
	18 x 20 x 81	$7^{1/16}$ x $7^{7/8}$ x $31^{7/8}$
Weight/cube	1 670 kg	3 675 lb
Weight/unit	68 kg	150 lb
Unit/Surface	6,86 / m^2	0,64 / ft^2
Surface/row	0,87 m^2	9,41 ft^2
Surface/cube	3,48 m^2	37,6 ft^2
Qty/cube	24 units	4 rows
Maximum height of the wall	0,72 m	2,35 ft

SPECIFICATIONS	CODES	STANDARD COLOUR
Smooth finish	PBR-950R-15	Grey and charcoal
		DELUXE COLOURS
	PBR-950R-02	Ice grey
	PBR-950R-21	Ivory beige
	PBR-950R-42	Sierra brown


INSTALLATION DETAILS

Wall installation

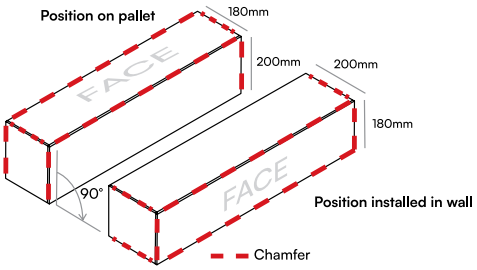

The Linia 180 wallstone must be installed so that it reaches a height of 180 mm and a depth of 200 mm. It is palletized with the face oriented upward. The block must therefore be turned so that the face is visible at the front once the wall is installed. In addition, the face of the block is chamfered.

Curb installation

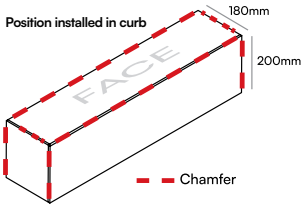

The Linia 180 wallstone can be used for curb installation.
In this case, the chamfered face must be oriented upward.

COLOURS



Grey and charcoal


Ice grey


Ivory beige


Sierra Brown

PATTERN



Pattern 1
Runner pattern

The Linia 180 wallstone is ideal for building fire pits, flower boxes, small retaining walls, or for defining garden beds, etc.
Its slender format features a smooth finish on the front, sides, and top.
It does not require a capstone.

BOLDUC
CONCRETE PRODUCT MANUFACTURER

CANADA : 1 800 463-8966
USA : 1 800 603-5567
WWW.BOLDUC.CA