


# VIA APPIA® 80 PAVER



## VIA APPIA® 80 PAVER

	HEIGHT X WIDTH X LENGTH CM / IN			COLORS
<b>Module 1</b>	8 x 8 to 12 x 12 to 24	3 <sup>1/8</sup> x 3 <sup>1/8</sup> to 4 <sup>3/4</sup> x 4 <sup>3/4</sup> to 9 <sup>1/2</sup>		Limestone gray Garnet red Sandstone beige Terracotta brown
Units/Surface	54,80 /m <sup>2</sup>	5,1 /ft <sup>2</sup>		
Qty/row	0,91 m <sup>2</sup>	9,8 ft <sup>2</sup>		
Qty/cube	8,20 m <sup>2</sup>	88,4 ft <sup>2</sup>		
Weight/cube	1525 kg	3355 lb		
Approximate coverage areas for one bag of polymeric sand ( 22,7 kg )			2,27 m <sup>2</sup>	24,4 ft <sup>2</sup>




	HEIGHT X WIDTH X LENGTH CM / IN			COLORS
<b>Module 2</b>	8 x 16 to 22 x 16 to 28	3 <sup>1/8</sup> x 6 <sup>1/4</sup> to 8 <sup>5/8</sup> x 6 <sup>1/4</sup> to 11		Limestone gray Garnet red Sandstone beige Terracotta brown
Units/Surface	25,20 /m <sup>2</sup>	2,3 /ft <sup>2</sup>		
Qty/row	0,91 m <sup>2</sup>	9,8 ft <sup>2</sup>		
Qty/cube	8,20 m <sup>2</sup>	88,4 ft <sup>2</sup>		
Weight/cube	1525 kg	3355 lb		
Approximate coverage areas for one bag of polymeric sand ( 22,7 kg )			3,78 m <sup>2</sup>	40,7 ft <sup>2</sup>

## COLORS



## PATTERNS

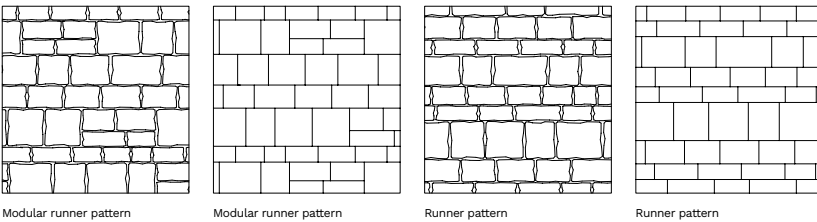

The layout shown in the above illustration is for information purposes only. Bolduc disclaims all responsibility for the excess or lack of pavers resulting from an installation according to these laying patterns.

# VIA APPIA® 80 PAVER

## TECHNICAL INFORMATIONS

Product	Standard	Compressive strength	Durability to freeze-thaw cycles with utilisation of de-icing salts	Water absorption	Dimensional tolerances
Via Appia 80 paver	CSA A231.2	50 MPa (7250 psi)	Maximum loss of initial weight in saline solution (NaCl 3%): 225 g/m <sup>2</sup> (0,74 oz / ft <sup>2</sup> ) after 28 cycles 500 g/m <sup>2</sup> (1,64 oz / ft <sup>2</sup> ) after 49 cycles	5 % maximum	Length: -1 mm to +2 mm (-1/32 in to + 5/64 in) Width: -1 mm to +2 mm (-1/32 in to + 5/64 in) Height: ±3 mm (±1/8 in)

## SPECIFICATION CLAUSE

**SPEC. NOTE:** Include the following article in Part 2 - Products of section 32 14 13 - Precast Concrete Pavers. It prescribes the choice of BOLDUC pavers and slabs for landscaping purposes. It should describe the geometric and physical characteristics and indicate the paver selected, its dimensions, color and finish.

### PART 2 - PRODUCTS

#### 2.1 Precast Concrete Pavers

- 1 Precast concrete pavers complying with CSA A231.2 and the following prescriptions.
- 2 Via Appia 80 paver supplied by BOLDUC.
  - 1 Thickness: 8 cm (3<sup>18</sup> in)
  - 2 Nominal Dimensions:
  - 3 Color :
  - 4 Texture :

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches.